

Gas



**AquoMAX**<sup>®</sup>  
Water Heaters

“Giving you more in  
**Hot Water**”



AUSTRALIAN MADE FIVE STAR GAS WATER HEATERS

*“5 star mains pressure Gas Storage hot water heaters provide a variety of options to suit most applications”*

## STAR PERFORMERS FROM AQUAMAX

Our Five Star gas storage water heaters provide a variety of options to suit most applications. Our stainless steel and vitreous enamel cylinders are backed by a 10 year (stainless steel) or 5 year (vitreous) cylinder warranty.<sup>1</sup>

Our flagship model AquaMAX G390SS has 390 Litres available in the first hour and with 185 Litres per hour recovery,<sup>2</sup> all at mains pressure.

*Eligible for government and/or industry incentives in some states.<sup>4</sup>*



### ENERGY EFFICIENT

AquaMAX Gas Water Heaters operate at over 84% thermal efficiency. As a result, AquaMAX Gas Water Heaters create less greenhouse emissions, and deliver considerable savings with reduced gas consumption over the life of the unit.<sup>3</sup>

### STAINLESS STEEL CYLINDER

Constructed from stainless steel, the AquaMAX cylinder can resist corrosion for a substantially longer period than conventional cylinders. The AquaMAX stainless steel range also has no need for sacrificial anodes.



## AQUAMAX G270VE

*Five Star efficiency in a vitreous cylinder*

A vitreous enamel water heater with 5 Star energy rating, the AquaMAX G270VE Gas Storage Water Heater offers 5 Star efficiency in a mains pressure unit.



AQUAMAX  
270

5 Star



AQUAMAX  
340

5 Star



AQUAMAX  
390

5 Star



## AQUAMAX G270SS

*Stainless Steel in a compact package*

At last, a compact water heater with a stainless steel tank! Boasting a five star energy rating, the AquaMAX G270SS Gas Storage Water Heater offers reduced gas consumption<sup>3</sup> utilising high efficiency gas burner technology.

## AQUAMAX G340SS

*Perfect hot water for new homes*

The AquaMAX G340SS, five star energy rated water heater for external installation features a 155L stainless steel tank with a 10 year cylinder warranty<sup>1</sup> and 340 Litres first hour delivery.

Specifically designed for installation where an approved tempering valve is to be fitted to prevent scalding.



## AQUAMAX G390SS

*Largest delivery, in our gas range*

The AquaMAX G390SS patented in-built mixing valve gives you 390 Litres first hour delivery with a five star energy rating.

The mixing valve adds a controlled mix of cold water, giving up to 205 Litres of 60°C<sup>2</sup> hot water delivery in the initial draw, with 185 Litres of recovery per hour thereafter.

*As an installation option on the AquaMAX G390SS, your plumber can install twin temperature delivery. This will give you greater flexibility so you can enjoy the convenience of 65°C<sup>2</sup> hot water in the kitchen and laundry when you need it, while taking comfort in the knowledge that it is safer for kids with bathroom hot water taps at 50°C<sup>2</sup> or lower.*

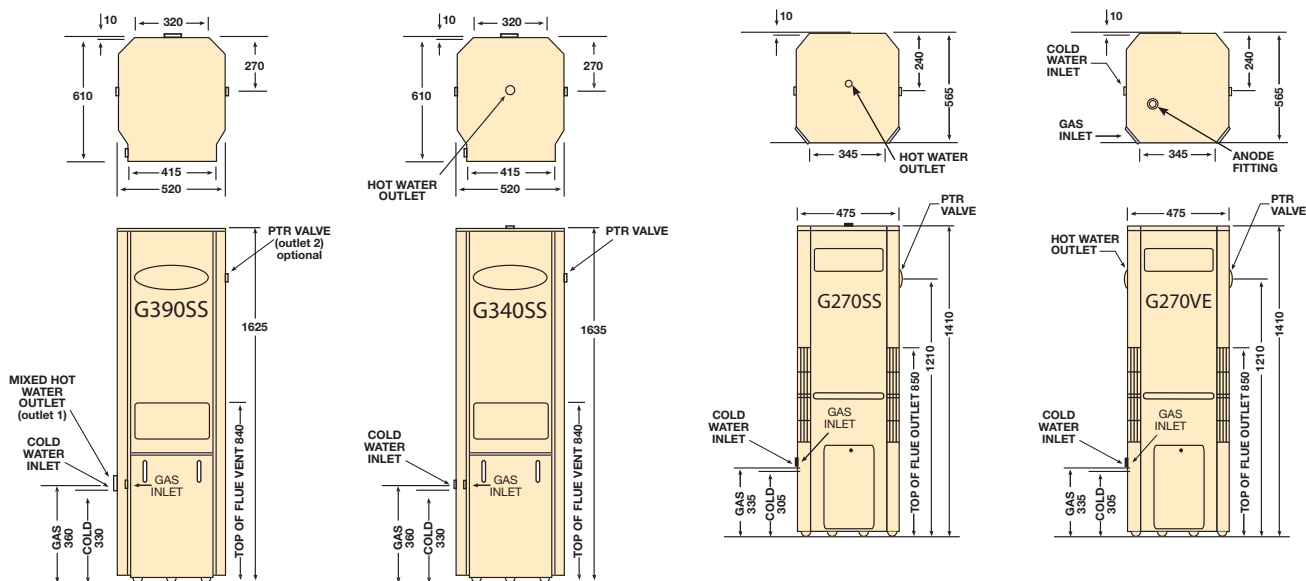
Variable water volume Control A	Thermostat Valve Control B	Approximate delivered water temp °C	Single Draw Delivery Litres (approx.)
		50°C	250L
2	4.0	50°C	250L
3	4.5	60°C	205L
4	4.5	65°C	175L
5	5.0	75°C	145L

Note: The above values are to be used as a guide only. They are based on a cold water inlet temperature of 15°C.

# AQUAMAX GAS WATER HEATER SPECIFICATIONS

## SPECIFICATIONS

	<b>G390 SS (WITH MIX)</b>	<b>G340 SS (WITHOUT MIX)</b>	<b>G270 SS</b>	<b>G270 VE</b>
Number of people Served	3-6	2-5	2-4	2-4
Cat. No.	G390SS	G340SS	G270SS	G270VE
Gas type	Natural	Natural	Natural	Natural/LPG
Tank Capacity	155 Litres	155 Litres	130 Litres	135 Litres
Nominal gas consumption	40 MJ/Hr	40 MJ/Hr	33 MJ/Hr	30 MJ/Hr
AGA Star Rating Index	5 Stars	5 Stars	5 Stars	5 Stars
Recovery rate at 45°C rise	185 Litres/Hr <sup>2</sup>	185 Litres/Hr <sup>2</sup>	145 Litres/Hr <sup>2</sup>	135 Litres/Hr <sup>2</sup>
Installation type	External only	External only	External only	External only
Pressure & Temperature Relief Valve setting	1400 kPa/99°C	1400 kPa/99°C	1400 kPa/99°C	1400 kPa/99°C
Max. water supply pressure w/o ELV	1120 kPa	1120 kPa	1120 kPa	1120 kPa
Tank material	stainless steel	stainless steel	stainless steel	vitreous enamel lined
Water inlet connection	Rp 3/4" (20mm) Female	Rp 3/4" (20mm) Female	Rp 3/4" (20mm) Female	Rp 3/4" (20mm) Female
Water outlet connection	Rp 3/4" (20mm) Female	Rp 1/2" (15mm) Female	Rp 1/2" (15mm) Female	Rp 3/4" (20mm) Female
Gas connection	1/2" flared compression	1/2" flared compression	1/2" flared compression	1/2" flared compression
Warranty (Cylinder)	10 years	10 years	10 years	5 years
WaterMark Licence No.	WMKA00200	WMKA00200	WMKA00200	WMKA00200
Overall height	1625mm	1635mm	1410mm	1410mm
Width (approx.)	520mm	520mm	475mm	475mm
Depth (approx.)	610mm	610mm	565mm	565mm
AGA Approval No.	AGA6114G	AGA6114G	AGA7477G	AGA6705G
Weight empty (approx.)	65 kg	65 kg	46 kg	65 kg



- 1 Full Warranty conditions available on request from AquaMAX Australia Pty Ltd. Call Toll Free 1800 676 000 or view at [www.aquamax.com.au](http://www.aquamax.com.au)
- 2 Based on cold water temperature of 15°C
- 3 When compared to 3 Star and 4 Star Gas Storage Water Heaters
- 4 When converting from Electric Storage to 5 Star Gas Storage



**Aquamax Australia Pty Ltd** 463-467 Warrigal Road Moorabbin Vic 3189 **Toll Free: 1800 676 000**  
 Ph: (03) 9532 2200 Sales Fax: (03) 9532 5244 Service Fax: (03) 9556 5534 A.B.N. 37 138 189 689  
 Email: [sales@aquamax.com.au](mailto:sales@aquamax.com.au) For more information visit [www.aquamax.com.au](http://www.aquamax.com.au)